PERIFIC

flow

The smart energy controller that optimizes your heating system.

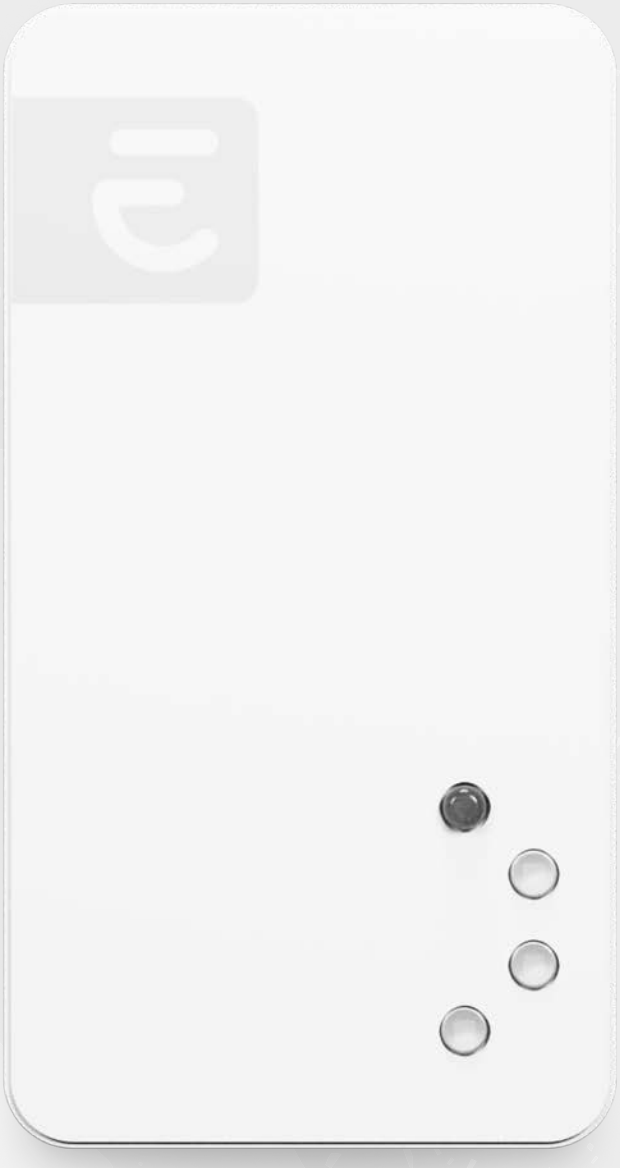

- Heat Pump Optimization
- Underfloor Heating Optimization
- Pool Optimization

PERIFIC

perific.com

PETIFIC
flow

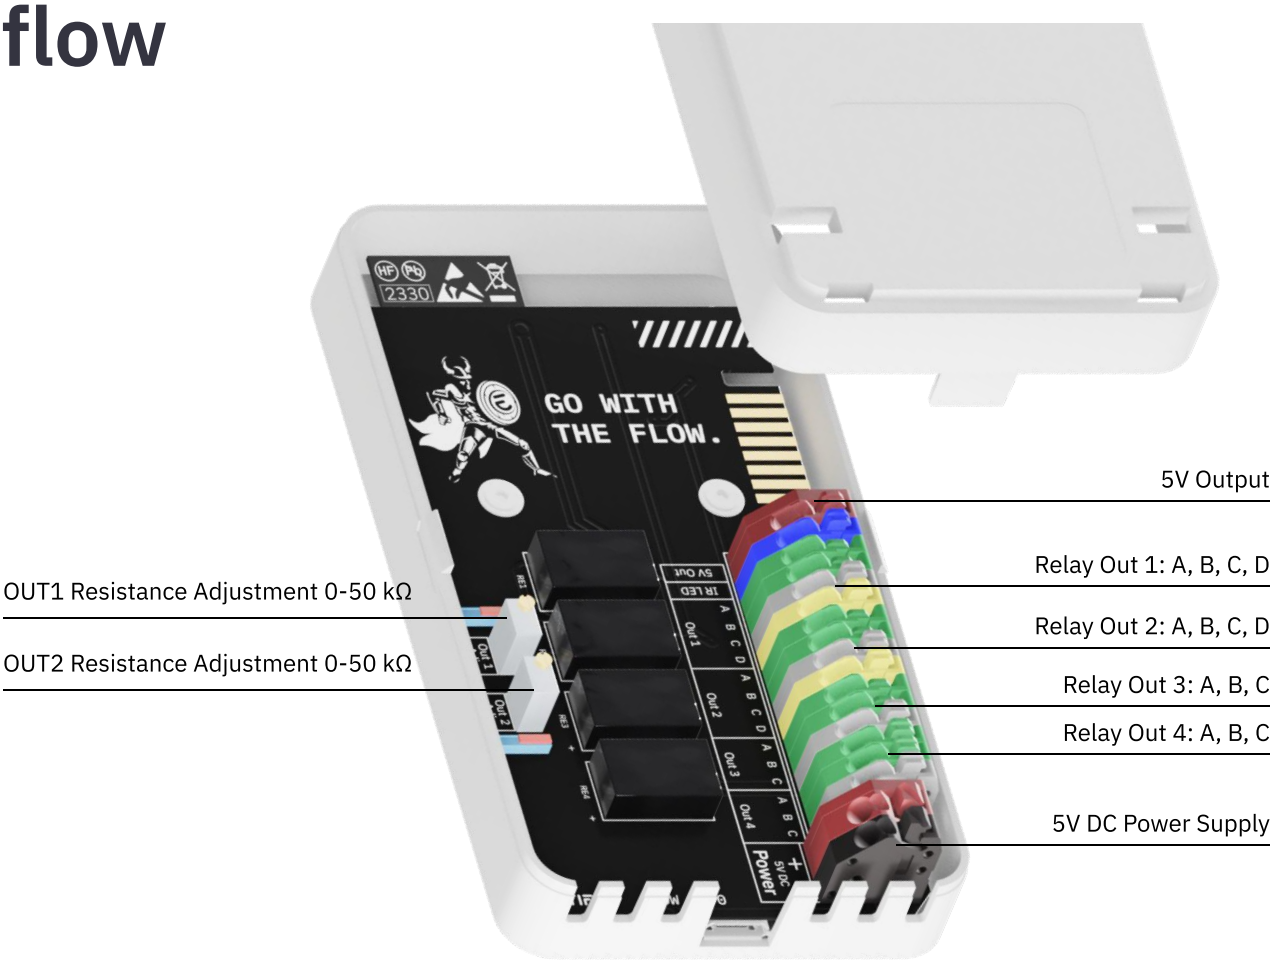

Tech specs

- 4 X ON/OFF Relay Outputs
- Relay Maximum Current:
  125 V AC/110 V DC | 1 A
- Supports Wi-Fi 2,4 gHz b/g/n
- Power Supply: 5V/12V DC
- IP Class: IP20
- Temp. Range: –40 °C ~ +65 °C
- Dimensions: 110 mm x 59 mm x 27 mm
- Weight: 80 g
- Packaging Dimensions:
  140 mm x 80 mm x 85 mm
- Packaging Weight: 350 g

App Functions

- Release Effect For EV Charger
- Price/Tariff Adapted Control
- Custom Scheduled Control
- Solar Energy Based Control

Compatibilities

- Temperature Input Control
- Heat Pump Control
- Underfloor Heating Control
- Pool Heating Control
- Small Facilitites Heating Systems
- Large Facilitites Heating Systems